

**OUTDOOR WALL PACK ADJUSTABLE LIGHT SENSOR IP65 10000LM 80W
4000K 120 BEAM BLACK INTEGRAL**

ILWPC003



Integral Compact Tough Wall Pack Lights are ideal for perimeter lighting as well as pedestrian and vehicle access areas in commercial and industrial environments. The IP65 weatherproof and IK08 impact-resistant cast aluminium body makes it perfectly suitable for outdoor installation. This model features a 90 degree adjustable head to shine light where you need it, as well as a light sensor, so the unit automatically switches on at dusk and off at dawn, increasing efficiency.

Details

Quick Order Code:	'079049
Barcode:	5055788241829
Category:	Luminaires
Range Name:	Compact Tough
Product Type:	Wall Packs
Product Body Finish:	Dark Brown
Market Segment:	Outdoor
Finish:	Dark Brown
Features:	Dusk-to-Dawn Sensor
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	285
Product Depth (mm):	119
Product Width (mm):	265
Product Weight (g):	4290
Optic:	Polycarbonate diffuser
Material:	ADC12 Aluminium
Construction:	Aluminium heat-sink, PC injection moulded driver case
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Wall
Mounting Type:	Rear Cable Entry
Placement / Application:	Outdoor

Electrical Data


Power Consumption (W) :	80
Power Factor:	0.95
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	9840
Luminous efficacy (lm/W):	123
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	116
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Lifetime (hours):	50000
Switching Cycles:	100000
Useful Lumens (lm):	9840

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	0
Maximum Operating Temperature (°C):	45

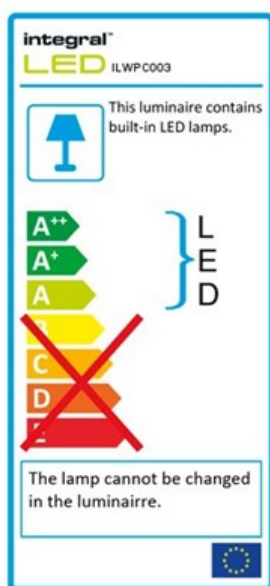

Packaging

Package Weight (g):	4690	Portal.integral-led.com
Package Length (mm):	335	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm):	315
Package Depth (mm):	170