

Cleaning:

- > Disconnect the power and clean the exterior only of this fitting with a moist (not wet) cloth.
- > Do not use any chemical or abrasive cleaners.

Lamp replacement:

- > Switch off the electricity at the mains.
- > Remove front cover.
- > Remove and replace lamp.
- > Secure cover.
- > Restore the power and switch on.

Replacement lamp type:

Wattage: 70 W
Supply Voltage: 240 V
Type: SON—I E27 (ES)

Eventually, you may want to replace this light fitting:

When your light fitting comes to the end of its life or you choose to update or upgrade it by replacing it, please do not dispose of it with your normal household waste, please recycle where facilities exist. When you need to dispose of this fitting, check with your retailer or local authority for suitable options. New regulations will encourage the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005).



If you experience problems:

If your light is defective or develops a fault, please return it to the place where you bought it. You can call our Helpline for advice. The Helpline will gladly give advice on any aspect of any Eterna Lighting product but may not be able to give specific instructions regarding individual installations.

If in doubt, consult a qualified electrician.

Help line:

Tel: 01933 673 144 Fax: 01933 678 083 Email: sales@eterna-lighting.co.uk
For answers to frequently asked questions (FAQs) and other information visit our web-site
www.eterna-lighting.co.uk



IMPORTANT!

Safety and Installation instructions

70W SON floodlight

Model(s)
SAP70MINI

Pack contents:

Flood light fitting	1
---------------------	---

**PLEASE READ THESE INSTRUCTIONS BEFORE
INSTALLING YOUR NEW FITTING**


PLEASE RETAIN FOR FUTURE REFERENCE

Read this first:

- > **If in any doubt, consult a qualified electrician.**
- > Switch off the mains before commencing installation and remove the appropriate circuit fuse.
- > Suitable for outdoor use.
- > This product is suitable for installation on surfaces with normal flammability (indicated by the "F" in a triangle) e.g. wood, plasterboard, masonry.
- > Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.
- > The chosen location of your new fitting should allow for the product to be securely mounted and safely connected to the mains supply (lighting circuit).
- > When choosing the location for your new fitting, ensure that the fixings will be anchored in a solid surface e.g. concrete, brick or a joist—do not fix directly onto panelling, cladding, plasterboard etc.
- > If the location of your new fitting requires the provision of a new electrical supply, the supply must conform with the requirements of the latest edition of the IEE wiring regulations.
- > This product is designed for permanent connection to fixed wiring: this should be either a suitable lighting circuit (protected with a 5 or 6 Amp MCB or fuse) or a fused spur (with a 3 Amp fuse) via a fused connection unit. We recommend that the supply incorporates a switch for ease of operation.
- > Make connections to the electrical supply in accordance with the following code:
 - Live - Brown or Red
 - Neutral - Blue or Black
 - Earth - Green and Yellow
- > This product must be connected to Earth.

Installation:

- 1) Loosen the two screws and lift off the front cover.
- 2) Remove the two screws that retain the reflector and lift it away.
- 3) Choose the position of the fixing holes in the back of the fitting and clear through using a suitably sized drill.
- 4) Using the back of the fitting as a template, mark off the position of the fixing holes on the mounting surface.
- 5) Choose the location of the cable entry (end or rear) and make a suitably sized hole.
- 6) Peel off the wax paper backing from the large square gasket (supplied) and stick it into the square recess in the back of the fitting over the fixing holes.
- 7) Fit either a rubber grommet or cable gland into the hole.
- 8) If fitting a grommet, pierce it but ensure that the hole is not made too large so that a good, water-tight seal is maintained around the cable. Thread the supply cable in through the grommet. If fitting a cable gland, ensure that it is properly tightened.
- 9) Using fixings appropriate to the weight of the fitting and the mounting surface, secure the fitting in position.
- 10) Fit the heat-proof sleeving over the supply cable.
- 11) Connect the supply cable to the terminals inside the fitting according to the wiring code listed opposite.
- 12) Secure the cable in the cable grip
- 13) Re-fit the reflector and securely tighten the screws.
- 14) Insert lamp—observe rated Wattage.
- 15) Replace the cover and secure in place. Ensure that the gasket around the cover is intact and fitted correctly.
- 16) Restore the power and switch on.

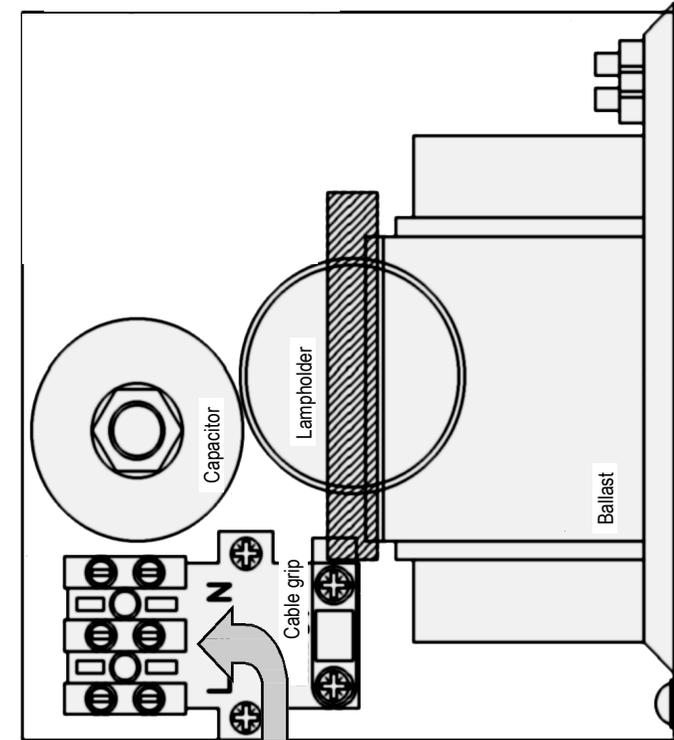

Make supply connections here

Safety markings:

IP65

