

# PRODUCT DATASHEET

## NAV-T 150 W SUPER 4Y

VIALOX NAV-T SUPER 4Y | High-pressure sodium vapor lamps for open and enclosed luminaires



---

### AREAS OF APPLICATION

- Streets
- Outdoor lighting
- Industrial installations
- Suitable for use in open and enclosed luminaires
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Long lifetime
- Very high luminous efficacy
- Very good luminous flux maintenance throughout the life of the lamp
- Energy savings of up to 50 % when replacing mercury vapor lamps (HQL)
- Optimum energy efficiency on POWERTRONIC PTo 3DIM ECGs

---

### PRODUCT FEATURES

- Lamp survival factor: 95 % after 16,000 h burning time
- Average lifetime: up to 36,000 h
- Lamp maintenance factor:  $\geq 80$  % after 16,000 h burning time (according to DIN 13201)
- Service lifetime: 4 years (at approx. 11 h/day)
- ErP compliant according to EU Regulation 245/2009
- Dimmable on conventional control gears and electronic control gears



**TECHNICAL DATA**

Electrical data


<b>Rated wattage</b>	152.00 W
<b>Lamp current</b>	1.8 A
<b>Nominal wattage</b>	150.00 W
<b>Nominal voltage</b>	100 V
<b>Ignition voltage</b>	3.3 / 5.0 kVp <sup>1)</sup>

<sup>1)</sup> Minimum / Maximum

Photometrical data

<b>Rated luminous flux</b>	17500 lm
<b>Color temperature</b>	2000 K
<b>Luminous flux</b>	17500 lm
<b>Color rendering index Ra</b>	≤25

Dimensions & weight

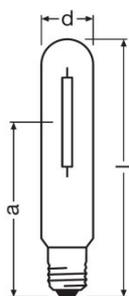

<b>Diameter</b>	47.0 mm
<b>Length</b>	210.0 mm
<b>Light center length (LCL)</b>	132.0 mm
<b>Product weight</b>	145.00 g

Temperatures & operating conditions

<b>Maximum permitted outer bulb temperature</b>	310 °C
<b>Maximum permitted base edge temperature</b>	210 °C

Lifespan

<b>Lifespan B50</b>	36000 h
<b>Lifespan B10</b>	24000 h
<b>Lifespan B5</b>	20000 h

Additional product data

<b>Base (standard designation)</b>	E40
<b>Product remark</b>	Important: Before replacing for NAV Standard lamps in existing installations, check that the igniters are suitable
<b>Design / version</b>	Clear
<b>System guarantee level</b>	3 (2/5)
<b>Mercury content</b>	21.0 mg

Capabilities


<b>Dimmable</b>	Yes <sup>1)</sup>
<b>Burning position</b>	Any
<b>Enclosed luminaire required</b>	No

<sup>1)</sup> In combination with POWERTRONIC PTo

Country-specific categorizations

<b>ILCOS</b>	ST-150-H/E/SL-E40-47/210
--------------	--------------------------

Light Distribution

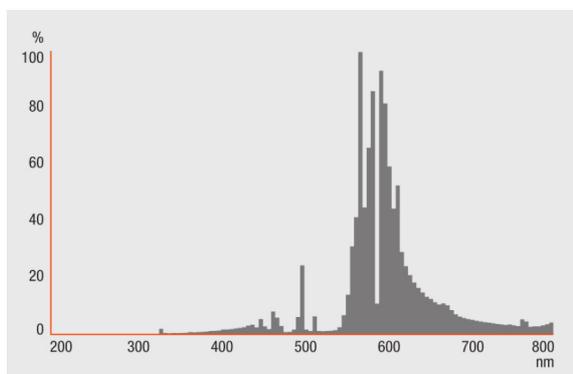

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

---

4050300024400	Sleeves 1	52 mm x 52 mm x 260 mm	145.00 g	0.70 dm <sup>3</sup>
4050300631790	Shipping carton box 12	245 mm x 266 mm x 200 mm	2043.00 g	13.03 dm <sup>3</sup>

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.ledvance.com/system-guarantee](http://www.ledvance.com/system-guarantee)

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

VIALOX NAV-T SUPER 4Y | High-pressure sodium vapor lamps for open and enclosed luminaires