


Compact Automatic Hand Dryer

Features

- ABS construction for high resistance against heat, water, and detergents
- Anti-tamper cover (fixing screws included)
- Constructed with sound and vibration reducing blocks to reduce noise level
- Automatic shuts off after 60 seconds to avoid wasted energy
- Self-resetting overheat thermostat provides protection from overheating if hand dryer becomes blocked



Safety Instructions


1. These instructions should be read carefully and retained after installation for future reference and maintenance.
2. Ensure that the mains power is switched off before carrying out installation or maintenance.
3. Installation must be carried out in accordance with the current edition of IET wiring regulations BS 7671, and by a qualified electrician.
4. The hand dryer should be supplied from a switched fused spur.
5. This Hand Dryer is electrical class 1 construction and must be earthed.
6. Ensure all electrical connections are secure and that there are no loose strands.
7. Do not install above washbasins or immediately adjacent to urinals, lavatories, baths and showers.
8. When in use, the hand dryers will accumulate dust. Cleaning and maintenance must be carried out regularly.
9. The unit is intended for drying hands only. Long hair should be kept away from air inlet vents.

Environmental Instructions


This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.

Installation Instructions


1. Remove product from the packaging and mark out and drill the fixing holes on the mounting surface.

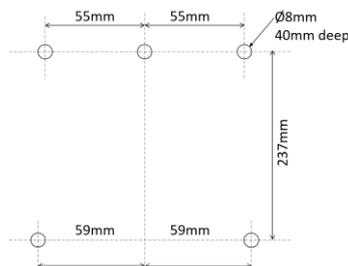


2. Fix the metal bracket to the mounting surface using the wall plugs and the screws provided.

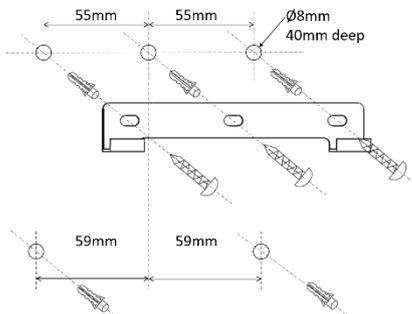

3. Remove the front cover by unscrewing the 4 retaining screws
4. Feed the supply cable through the cable entry hole in the hand dryer base and terminate the conductors into the terminal block ensuring the correct polarity is observed. Secure the supply cable in the cord grip provided.
5. Replace the plastic cover and secure it with retaining screws
6. Align the mounting slots at the rear of the hand dryer with the metal bracket and clip the unit in place.

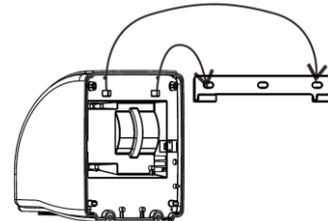

7. Secure the base of the hand dryer using the screws provided



Operation

The hand dryer is automatically activated when hands are placed under the air outlet. Once the hands are removed, the hand dryer automatically switches off within 2 seconds. If the hand dryer is running continuously, it will switch off after 60 seconds to conserve energy. To reactivate the hand dryer, move the hands away from the air outlet and place back.

Specification

Input Voltage:	220V – 240V AC 50Hz	Air Speed	30m/s	
Electrical Classification:	Class I	Noise Level (at 2m)	76dB	
Rated Power	Heater Element	1.95kW	IP Rating	IPX1
	Motor	350W	Weight	3.0kg
Drying time	10-15Sec	Dimensions	245x265x207mm	

Deta Electrical Company Limited

Luton Bedfordshire UK

deta.co.uk

Technical Helpline: +44(0)1582 544 548