

Cleaning:

- > Clean this light fitting only with a soft dry cloth
- > Do not use any chemical or abrasive cleaners.

Lamp replacement:

- > Switch off the electricity at the mains.
- > Undo the screws at the top of the fitting and lift off the lid.
- > Remove and replace lamp.
- > Replace the lid and tighten the two screws.

Replacement lamp type:

Wattage:	L60B / L60WH 60 W	L100B / L100WH 100 W
Type:	ES GLS	
Note:	Do not fit reflector lamps (spotlight or crown reflector)	

Eventually, you may want to replace this light fitting:

When your light fitting comes to the end of its life or you choose to update or upgrade it by replacing it, please do not dispose of it with your normal household waste, please recycle where facilities exist. When you need to dispose of this fitting, check with your retailer or local authority for suitable options. New regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective 2nd January 2007).



If you experience problems:

If your light is defective or develops a fault, please return it to the place where you bought it. You can call our Helpline for advice. The Helpline will gladly give advice on any aspect of any Eterna Lighting product but may not be able to give specific instructions regarding individual installations. If in doubt, consult a qualified electrician.

Help line:

Tel: 01933 673 144 Fax: 01933 678 083 Email: sales@eterna-lighting.co.uk
For answers to frequently asked questions (FAQs) and other information visit our web-site
www.eterna-lighting.co.uk



IMPORTANT!

Safety and Installation instructions

Hexagonal Wall Lantern

Model(s)
L60WH, L60B, L100WH, L100B

Pack contents:

Lantern fitting	1
Fixing pack	1

**PLEASE READ THESE INSTRUCTIONS BEFORE
INSTALLING YOUR NEW FITTING**

PLEASE RETAIN FOR FUTURE REFERENCE


Read this first:

- > This light fitting must be installed in accordance with the Building Regulations. These may be obtained from HMSO or viewed and downloaded from www.communities.gov.uk following the link for Building Regulations.
- > If in any doubt, consult a qualified electrician.
- > Switch off the mains before commencing installation and remove the appropriate circuit fuse.
- > Suitable for outdoor use.
- > This product is suitable for installation on surfaces with normal flammability (indicated by the "F" in a triangle) e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
- > Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.
- > The chosen location of your new fitting should allow for the product to be securely mounted and safely connected to the mains supply (lighting circuit).
- > If the location of your new fitting requires the provision of a new electrical supply, the supply must conform with the requirements of the Building Regulations.
- > This product is designed for permanent connection to fixed wiring: this should be either a suitable lighting circuit (protected with a 5 or 6 Amp MCB or fuse) or a fused spur (with a 3 Amp fuse) via a fused connection unit. We recommend that the supply incorporates a switch for ease of operation.
- > Make connections to the electrical supply in accordance with the following code:
 - Live - Brown or Red
 - Neutral - Blue or Black
- > This fitting is double insulated, do not connect any part to earth.

- > You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out: these tests are specified in the Wiring Regulations (BS7671) referred to in the Building Regulations. If in doubt, consult a qualified electrician.

Installation:

- 1) Remove the two screws near to the top of the transparent panels and lift off the top cover—see 1, opposite.
- 2) Remove the two nuts on the front of the wall bracket and remove the plastic back-plate.
- 3) Using the back-plate as a template, mark the location of the fixing holes—see 2.
- 4) Pierce the rubber grommet in the back-plate and thread the supply cable through. Take care not to make the hole too large so that the grommet fits tight around the cable and the waterproof seal is maintained.
- 5) Secure the back-plate to the mounting surface using the fixings supplied. If the fixings supplied are not appropriate to your installation, select suitable alternatives.
- 6) Make the electrical connections according to the wiring code—see left.
- 7) Locate the fitting on the two screws protruding from the back-plate and secure in position using the two nuts—see fig. 3. Take care to position the fitting correctly onto the soft gasket.
- 8) Fit a new bulb observing the maximum Wattage and bulb type marked near the lampholder (also on the back page of these instructions).
- 9) Re-fit the top of the fitting tightening the screws securely but take care not to over-tighten.
- 10) Restore the power and switch on.

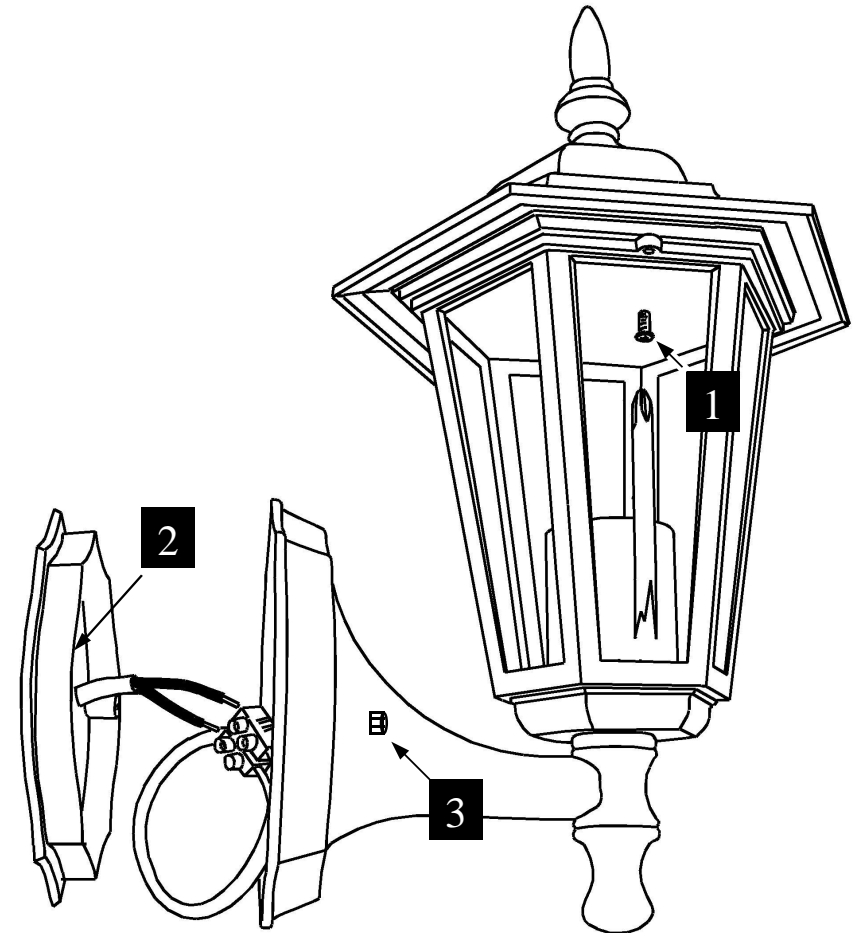

Safety markings:

