

CLEO Swift 160W -R XPT

FR71 T12 160W VHO PH

Item No: 926266040

Dimensions

Length (nom.)	1760,0 mm
Length without pins (max.)	1763,8 mm
Length base - pin (min.)	1768,5 mm
Length base - pin (max.)	1770,9 mm
Length with pins (max.)	1778,0 mm
Diameter (max.)	40,4 mm
Base	G13

Electrical Data

Supply voltage:	230 V +/-0,2%
Ballast (nominal):	160W / 230V
Lamp wattage (nominal):	153 W +/-5W
Lamp current (nominal)	1500 mA
Lamp voltage (nominal)	125 V +/-10V

Physical Data

UVA Irradiance (315 - 400 nm) ¹	32,0 W/m ² +/-10%
UVB Irradiance (280 - 315 nm) ¹	655 mW/m ² +/-10%
UVB/UVA ratio	2,0%
E _{er} (250 - 400 nm) ¹	108 mW/m ² +/-15%
Recommended useful life	1000 Hours
Output after 500 hrs (based on 1h value)	80% -10%


Lamp Specifications

(typical values acc. IEC / EN 61228)

- a) Dimensions
 - See dimensions
- b) Reflector: 210°
- c) Specified ballast: Cosmopower S 160W / 230V
- d) Electrical data:
 - Lamp power (typical) 153 W
 - Lamp current (typical) 1500 mA
 - Lamp voltage (typical) 125 V
- e) Effective Irradiance¹
 - UV-erythem (250 - 400 nm) 112 mW/m²
 - NMSC (250 - 320 nm) 153 mW/m²
 - NMSC (321 - 400 nm) 24 mW/m²
- f) Aquivalency code 160-R-112/6,4

¹ acc. IEC measured in a distance of 25 cm to the lamp axis under stable operating conditions

Relative Spectral Distribution

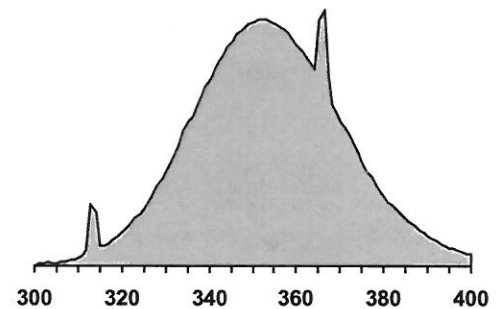

Recommended Exposure Time

UVA irradiance in W/m ²	First session tanning time in minutes	Maximum tanning time in minutes by skin type		
		2	3	4
450	1,1	2,7	3,8	4,9
500	1,0	2,5	3,5	4,4
550	0,9	2,2	3,1	4,0

Typical irradiance of a tanning unit²: 500 W/m²

Data regarding effective dose and recommended tanning times, are basing on norm DIN EN 60335-2-27.

² The tanning unit of reference contains 17 lamps in the bench and 33 lamps in the canopy. The bench is covered by double acrylics and the canopy by a single one. Please contact the equipment manufacturer, for individual irradiance of your solarium. These information are for orientation use only and have to be coordinated / adjusted individually.