



5 Year Warranty



Colour Temp. Selectable



Mains cable, 30cm link lead and fixing clips supplied




**Eterna**  
Everyday Lighting For Professionals

**COLOUR SELECTABLE LED LINKABLE LINEAR UNDER-CABINET STRIP LIGHT**

High quality linkable LED cabinet lights inclusive of accessories for easy installation. Use the sliding switch to choose between warm, cool or daylight white light to suit the requirement or preference. Low energy consumption and long lifetime makes the LINKCS range the optimal choice for stylish and effective task lighting

- Superb light output and distribution, with opal diffuser for a soft effect - perfect for task lighting
- Easily select between warm white, cool white or day light via a simple switch to suit the application or preference
- Link a maximum of 12 fittings end-to-end for a continuous line, or space apart with the 30cm link lead (included)
- Safe and simple connectivity thanks to the dual polarity of the 2 pins at each end
- Simple rocker switch for local on/off control
- Fitting comes with a 1.8m mains lead, 30cm link lead, and integral plug & sockets for simple and easy connection (no driver required)
- Slimline design for unobtrusive installation under cabinets. Ideal for kitchens
- Additional 50cm link lead accessory: product code: LINKL05
- BS EN 60598

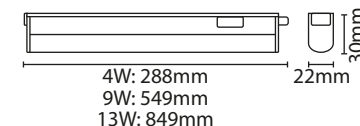

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LINKCS4	4W	3000K	380 lm	25,000 hrs	IP20	1 / 10
		4200K	385 lm			
		6500K	390 lm			
LINKCS9	9W	3000K	896 lm	25,000 hrs	IP20	1 / 10
		4200K	901 lm			
		6500K	905 lm			
LINKCS13	13W	3000K	1264 lm	25,000 hrs	IP20	1 / 10
		4200K	1280 lm			
		6500K	1295 lm			
LINKL05	Optional 50cm link lead					1 / 5

SEE PAGE 2 FOR ENERGY INFO

LED LAMP SPECIFICATIONS:	4W	9W	13W
<b>Luminaire lumens (with diffuser):</b> Warm White, Cool White, Daylight White	3000K - <b>380 lm</b>	3000K - <b>896 lm</b>	3000K - <b>1264 lm</b>
	4200K - <b>385 lm</b>	4200K - <b>901 lm</b>	4200K - <b>1280 lm</b>
	6500K - <b>390 lm</b>	6500K - <b>905 lm</b>	6500K - <b>1295 lm</b>
<b>Lumens from chip (array):</b> Warm White, Cool White, Daylight White	3000K - <b>425 lm</b>	3000K - <b>1009 lm</b>	3000K - <b>1386 lm</b>
	4200K - <b>431 lm</b>	4200K - <b>1011 lm</b>	4200K - <b>1410 lm</b>
	6500K - <b>437 lm</b>	6500K - <b>1013 lm</b>	6500K - <b>1434 lm</b>
<b>Useful lumens (array):</b>	3000K - <b>353 lm</b>	3000K - <b>833 lm</b>	3000K - <b>1175 lm</b>
	4200K - <b>358 lm</b>	4200K - <b>837 lm</b>	4200K - <b>1190 lm</b>
	6500K - <b>363 lm</b>	6500K - <b>841 lm</b>	6500K - <b>1204 lm</b>
Rated Wattage	4W	9W	13W
Rated luminous flux	353/358/363 lm	833/837/841 lm	1175/1190/1204 lm
Nominal life time of the lamp	25,000 hrs	25,000 hrs	25,000 hrs
Colour temperature	3000/4200/6500K	3000/4200/6500K	3000/4200/6500K
Number of switching cycles before premature lamp failure	12,500	12,500	12,500
Warm-up time up to 60% of the full light output	<2s	<2s	<2s
Dimmable	No	No	No
Nominal beam angle	130°	130°	130°
Rated power	4W	9W	13W
Rated lamp lifetime	25,000 hrs	25,000 hrs	25,000 hrs
Displacement factor	>0.5	>0.5	>0.5
Lumen maintenance factor at end of nominal life	>0.958	>0.958	>0.958
Starting time	<0.5s	<0.5s	<0.5s
Colour rendering	>80	>80	>80
Colour consistency	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse
Voltage / Frequency	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
Lumen efficacy	3000K - 95 lm / W	3000K - 99.55 lm / W	3000K - 97.23 lm / W
	4200K - 96.25 lm / W	4200K - 100.11 lm / W	4200K - 98.46 lm / W
	6500K - 97.5 lm / W	6500K - 100.55 lm / W	6500K - 99.61 lm / W
This product contains a Light Source of Energy Efficiency Class F			
Not suitable for accent lighting			

