


Polished Chrome

Brushed Nickel

White

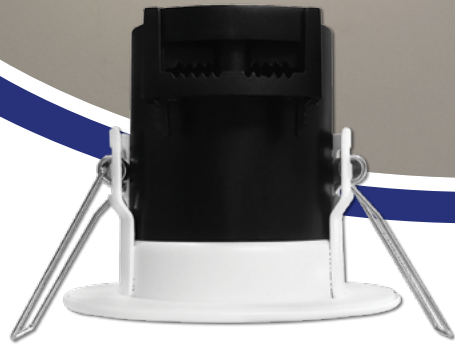


Eterna[®]
Everyday Lighting For Professionals

5W FIRE RATED IP65 LED DOWNLIGHT

Compact and convenient design with high quality loop in, loop out terminal block

- Fire Rated - individually tested within 30, 60 and 90 minute ceiling constructions
- Foam bezel seals against air permeability
- Compact and convenient design
- 40° beam angle • Push terminals
- Loop-in Loop-out wiring facility

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KFIRE4CR	Polished Chrome	5W	4000K	515 lm	25,000 hrs	IP65 (front) IP20 (rear)	65mm	1 / 20
KFIRE4SN	Brushed Nickel							
KFIRE4WH	White							



PLEASE NOTE:
Due to the huge variety of dimmers in the market, dimming performance with all types cannot be guaranteed, compatibility should be tested before installation.

LED LAMP SPECIFICATIONS:

Luminaire lumens (with diffuser)	515 lm
Lumens from chip (no diffuser)	600 lm
Useful lumens	420 lm
Rated Wattage	5W
Rated luminous flux	420 lm
Nominal life time of the lamp	25,000 hrs
Colour temperature	4000K
Number of switching cycles before premature lamp failure	12,500
Warm-up time up to 60% of the full light output	Instant Full Light
Dimmable	Yes
Nominal beam angle	40°
Rated power	5W
Rated lamp lifetime	25,000 hrs
Lamp power factor	0.8
Lumen maintenance factor at end of nominal life	70%
Starting time	<0.5s
Colour rendering	80
Colour consistency	Within a six step Macadam ellipse
Rated peak intensity	649cd
Rated beam angle	40°
Voltage / Frequency	240V~50Hz
Lumen efficacy: 103 lm / W	
Earthed	



5
Year Warranty



Dimmable



Fire Rated



✓ IES Files



Earthed