Lighting design service available



ED LAMP SPECIFICATIONS:							
Luminaire lumens (with diffuser)	410 lm						
umens from chip (no diffuser)	590 lm						
Jseful lumens	380 lm						
Rated Wattage	5.5W						
Rated luminous flux	lux 380 lm						
Nominal life time of the lamp	25,000 hrs						
Colour temperature	3000K						
Number of switching cycles pefore premature lamp failure	12500						
Warm-up time up to 60% of he full light output	Instant full light						
Dimmable	No						
Nominal beam angle	120°						
Rated power	5.5W						
Rated lamp lifetime	25,000 hrs						
Displacement factor	≥0.9						
umen maintenance factor at end of nominal life	≥0.8						
Starting time	Instant full light						
Colour rendering	≥80						
Colour consistency	Within a six step Macadam ellipse						
Rated peak intensity	171.88cd						
Rated beam angle	120°						
oltage / Frequency 240V~50Hz							
Lumen efficacy: 174	4 lm / W						
This product contains a Light Efficiency Class							
Earthed							
Not suitable for accen	t lighting						




LED DUAL VOLTAGE SHAVER LIGHT

Ever popular fittings offering functionality and long term performance for domestic and commercial bathrooms

- Polycarbonate construction
- Optional fit chrome effect trims included
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Permanent power to shaver socket: with a pull cord switch for isolated illumination
- Access cover to connection block: easy wiring from the front of the fitting
- Please note: bathroom shaver lights are not suitable for toothbrush chargers

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	Fitting IP Rating	Socket IP Rating	MOM / OPQ
LEDSH4	4 5.5W	3000K	410 lm	25,000 hrs	IP44	IP21	1/10

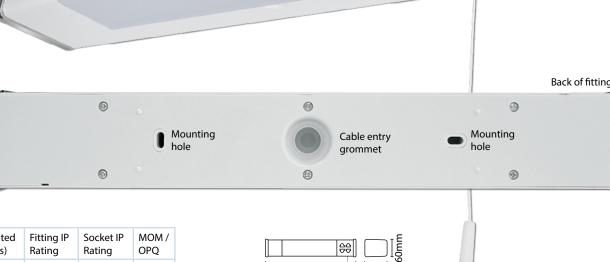

390mm

65mm ļ

SHAVERS ONLY

5 110V 240V