

# SPECIFICATION SHEET



## 110V LED BASTION SITE NON-CORROSIVE FITTINGS

### Applications

- Site Lighting



Image shown SNCF420


### Specification

<b>LED:</b>	96-264pcs of 0.2W SMD 2835
<b>Material:</b>	ABS and polycarbonate
<b>Lumen Output:</b>	1800-4500lm (180lm - 450lm in emergency mode)
<b>Colour Temperature:</b>	4000K
<b>Guarantee:</b>	2 Years
<b>Life Expectancy:</b>	30,000 Hours
<b>Working Temperature:</b>	-10° - 40°C (0° - 40°C in emergency)
<b>Power Factor:</b>	0.5 / 0.9
<b>Beam Angle:</b>	120°
<b>CRI:</b>	80 Ra

### Additional Information

- 90lm/W • Accessory pack included. • Fast fit connector included. • Hanging bracket included. • Ni-Cd Battery included in the emergency versions. • Opal diffuser • 20mm gland sizes
- Painted metal LED tray included. • Plastic clips included.
- Yellow finish

### Dimensions

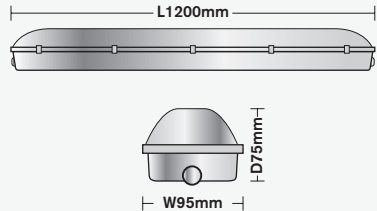

Code	Wattage	LED Qty	Emergency	Lumen Output	Power Factor	Dimensions (L x W x D mm)
SNCF220	20W	96pcs	No	1800lm	0.5	600 x 95 x 75
SNCF220E	20W	96pcs	Yes	1800lm	0.5	600 x 95 x 75
SNCF420	20W	144pcs	No	1800lm	0.5	1200 x 95 x 75
SNCF420E	20W	144pcs	Yes	1800lm	0.5	1200 x 95 x 75
SNCF525	25W	168pcs	No	2250lm	0.9	1500 x 95 x 75
SNCF525E	25W	168pcs	Yes	2250lm	0.9	1500 x 95 x 75
SNCF550	50W	264pcs	No	4500lm	0.9	1500 x 95 x 75
SNCF550E	50W	264pcs	Yes	4500lm	0.9	1500 x 95 x 75