

**OMNI FILAMENT GLS BULB B22 1521LM 11.2W 2700K NON-DIMM 300 BEAM CLEAR FULL GLASS INTEGRAL**

ILGLSB22NC121



Integral Filament Omni GLS Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in ceiling pendants and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

<b>Quick Order Code:</b>	168546
<b>Barcode:</b>	5055788260202
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	104
<b>Product Width (mm):</b>	60
<b>Product Weight (g):</b>	36
<b>Material:</b>	Aluminium, Glass
<b>Base Term:</b>	Bayonet cap
<b>Bulb Base:</b>	B22
<b>Construction:</b>	Glass shell, Filament strip, Aluminium base
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	GLS
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, General Lighting
<b>Spot Type:</b>	Filament

**Electrical Data**

<b>Power Consumption (W) :</b>	11.2
<b>Power Factor:</b>	0.5
<b>Wattage equivalent (W):</b>	100
<b>Amperage (mA):</b>	90



Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	100
EN:	EN-62560
LVD Certified:	Yes

## Light Data

Luminous Flux in Lumens (lm):	1521
Luminous efficacy (lm/W):	135
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	320
Colour Rendering Index (CRI):	80
Colour Type:	Single
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Filament chip
Lifetime (hours):	15000
Switching Cycles:	7500

## Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A++
New Energy Rating:	D
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

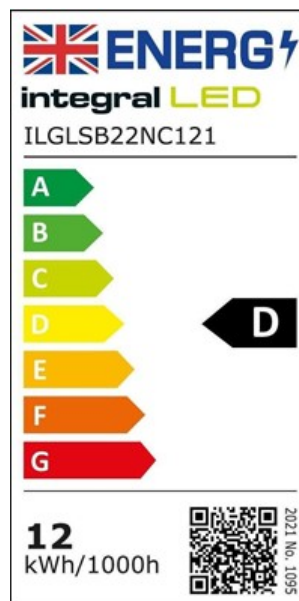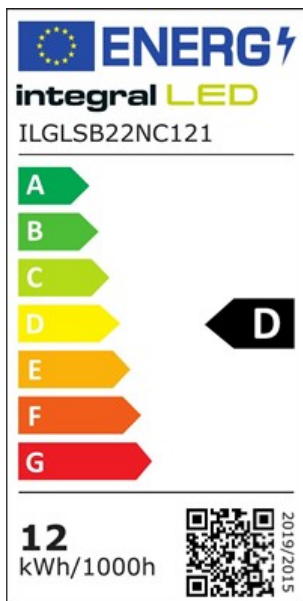

## Packaging

[Portal.integral-led.com](http://Portal.integral-led.com)

	98
<b>Package Weight (g):</b>	70
<b>Package Length (mm):</b>	70
<b>Package Width (mm):</b>	122
<b>Package Depth (mm):</b>	