


9/18W Output Led RG10-q DD

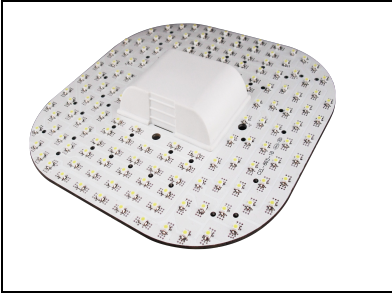

Features:

- Save energy up to 50% comparing with traditional Fluorescent 2D fittings.
- Long Life of 30000h, 3 times longer than with Fluorescent 2D Lamps.
- Popular RG10-q base and standard shape for direct replacement of RG10-q base Fluorescent DD Lamps.
- Instant start.
- Not dimmable.
- Negligible UV and IR radiation output.
- Direct replacement of the DD fluorescent lamps.

Specifications:

Rated Lamp Wattage	9W	18W
Equ. Watt	16W	38W
Voltage	90-260V	90-260V
Line Frequency	50/60Hz	50/60Hz
Input Current	80mA	160mA
Quantity of LED(pcs)	120	240
Dimmable	No	No
Base	RG10-q	RG10-q
Beam Angle	120°	120°
Life to 50% failure	30000hr	30000hr
Color Temperature	4000K/6500K	4000K/6500K
CRI	76Ra	76Ra
Lamp Luminous Flux	600lm (4000K)	1200lm (4000K)
	8000lm (6500K)	1400lm (6500K)
Lumen maintenance 8000h	95%	95%
Lumen maintenance 30000h	80%	80%
Replacement of CFL	16WDD	38WDD
Ambient Temperature	-20°C to 40°C	-20°C to 40°C
LED Chip	Epistar(3528)	Epistar(3528)
Length	145	192
Width	145	192
Packaging type	Colour Box	Colour Box
Qty per Box	1	1
Qty per mid-Carton		
Qty per Carton		
Net weight Per piece		
Gross Weight per Carton		