



# MASTER HPI-T Plus

MASTER HPI-T Plus 250W/645 E40 1SL

Quartz metal halide lamps with clear outer bulb

## Product data

### • Product Data

Order code	179890 15
Full product code	871150017989015
Full product name	MASTER HPI-T Plus 250W/645 E40 1SL
Order product name	MASTER HPI-T Plus 250W/645 E40 1SL/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500179890
Bar code on outerbox - EAN3	8711500182975
Logistic code(s) - 12NC	928076109230
ILCOS code	MT-250/45/2B-H-E40-/H
Net weight per piece	0.161 kg

### • General Characteristics

System Description	na [-]
Cap-Base	GES [GES]
Bulb	T46 [T 46mm]
Bulb Finish	Clear
Burning Position	p20 [Parallel +/-20D or Horizontal(HOR)]
Life to 5% failures	5000 hr
Life to 10% failures	7500 hr
Life to 20% failures	11000 hr
Life to 50% failures	20000 hr
LSF EM 12000h Rated,12h cycle	76 %
LSF EM 16000h Rated,12h cycle	63 %
LSF EM 20000h Rated,12h cycle	50 %

LSF EM 2000h Rated, 12h cycle	99 %
LSF EM 4000h Rated, 12h cycle	96 %
LSF EM 6000h Rated, 12h cycle	93 %
LSF EM 8000h Rated, 12h cycle	88 %

### • Electrical Characteristics

Lamp Wattage	250 W
Lamp Voltage	128 V
Lamp Current EM	2.10 A
Dimmable	no
Lamp Wattage EM 25°C, Rated	245 W
Lamp Wattage EM 25°C, Nominal	250 W

### • Environmental Characteristics

Mercury (Hg) Content	33 mg
----------------------	-------

### • Light Technical Characteristics

Colour Code	645 [CCT of 4500K]
Colour Rendering Index	65 Ra8
Colour Designation	Cool White
Colour Temperature Technical	4500 K
Colour Temperature Chromaticity Coordinate X	4440 K
Chromaticity Coordinate Y	365 -

# PHILIPS

sense and simplicity

# MASTER HPI-T Plus

Chromaticity Coordinate Y	377 -
Lum Efficacy Rated EM 25°C	84 Lm/W
LLMF EM 20000h Rated	60 %
LLMF EM 16000h Rated	63 %
LLMF EM 12000h Rated	68 %
LLMF EM 8000h Rated	73 %
LLMF EM 6000h Rated	77 %
LLMF EM 4000h Rated	82 %
LLMF EM 2000h Rated	90 %

Luminous Flux EM 25°C, Rated 20500 Lm

### • Product Dimensions

Overall Length C	257 mm
Diameter D	47 mm
Light Center Length L	158 mm
Arc Length O	29 mm



### • Luminaire Design Requirements

Cap-Base Temperature	250 C
Bulb Temperature	550 C

## Warnings and Safety


- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps

## Dimensional drawing



Product	C (Max)	D (Max)	L (Norm)	O (Norm)
HPI-T Plus 250W/645 E40	255	46.5	158	29

## Photometric data

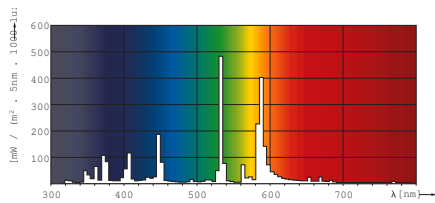

MASTER HPI-T Plus

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 – Ecodesign requirements, applicable from 13 April 2010.

### 1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
  - b) Nominal and rated lamp luminous flux;
  - c) Rated lamp efficacy at 100 h in standard conditions.
  - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
  - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
  - f) Lamp mercury content as XX mg;
  - g) Colour Rendering Index (Ra) of the lamp;
  - h) Colour temperature of the lamp;
  - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
- For more information see <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, April 11  
data subject to change