



FEATURES & BENEFITS

- › Frosted effect for softer tone of light
- › Low profile for easy installation
- › Robust cable for outdoor use

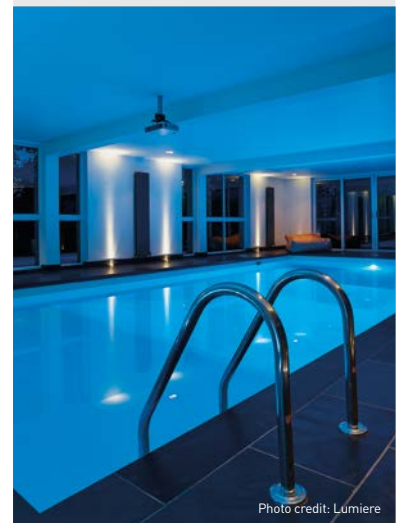


Photo credit: Lumiere

GL018 C

Small LED marker light

IP68

Submersible to 9m

1 yr

1 year guarantee

120°

0.5W

Ø28

32°C

1/35°C

300g

0

70,000h

35DCM

ZONE

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	120°	GL018 C NW	>70Ra	3	6	1
3000K	120°	GL018 C WW	>80Ra	3	6	1
Amber	120°	GL018 C AMBER	-	-	-	-
Blue	120°	GL018 C BLUE	-	-	-	-
Green	120°	GL018 C GREEN	-	-	-	-
Red	120°	GL018 C RED	-	-	-	-

GENERAL

Construction material	Stainless steel (316)
Drive over / walk over	Walk over (5mm toughened glass)

WIRING

Cable/flying lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of wiring required	Parallel


LED DRIVERS

Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PS1524	-	Yes	Yes (PDCINT1-10V)	0 (1 when dimming)	1	30
PS5024	-	Yes	Yes (PDCINT1-10V)	0 (1 when dimming)	1	100
PSDIP10024	-	Yes	Yes (1-10V)	0 (1 when dimming)	1	200


ACCESSORIES

Product code	Description
JB1 / JB5 / JB6	IP68 waterproof connectors
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
PDCINT1-10V	1-10V dimming interface for use with 24V LED drivers

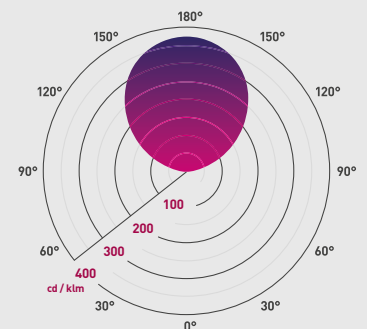

4000K 120°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED A++ A+ A C D E

874/2012