


[Products](#) > [Magnetic chokes for HID](#) > [OG Standard](#) > **OGLIS 250 – 1,000 W and OGLS 400 – 600 W**

OGLIS 250 – 1000 W and OGLS 400 – 600 W

Sodium vapour lamps, metal halide lamps

Product description

- ▶ For sodium lamps and metal halide lamps
- ▶ Chokes with reversible thermal cutout: trigger temperature 155 °C
- ▶ Device with double insulation: irreversible thermal cutout, trigger temperature 214 °C

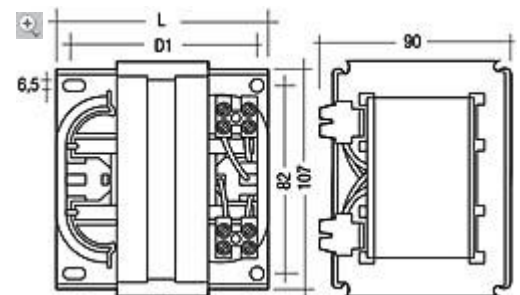

Ordering data				
Weight	Packaging, carton	Packaging, pallet	Type	Article number
Ballasts in standard design				
3.1 kg	6 pieces	216 pieces	OGLIS 250W 40 230-250/50 040A094 TP	27002347
4.5 kg	4 pieces	144 pieces	OGLS 400W 60 220-240/50 060A114 TP	27002362
6.7 kg	3 pieces	108 pieces	OGLS 600W 100 220-240/50 100B154 TP	20882197
9.0 kg	2 pieces	72 pieces	OGLIS 1000 A024W 220-240/50 140A194	22148490
9.0 kg	2 pieces	72 pieces	OGLIS 1000 A024W 220-240/50 140A194	27002350
Ballasts with double insulation				
3.2 kg	6 pieces	216 pieces	OGLIS 250 C203D 230-250/50 040A094	22149035
4.2 kg	4 pieces	144 pieces	OGLS 400 C203D 230-250/50 060A114	22149038
Ballasts with pulser tapping				
3.1 kg	6 pieces	216 pieces	OGLIS 250 PC023W 230/240/50 040A094	22149231
11.6 kg	2 pieces	72 pieces	OGLIS 1000 PC023W 230/240/50 180B234	22148485
Ballasts for 60 Hz				
4.2 kg	4 pieces	144 pieces	OGLS 400W 60 220-240/60 060A114	20565518
5.4 kg	3 pieces	108 pieces	OGLS 600W 80 220-240/60 080A134	20821091
9.0 kg	2 pieces	72 pieces	OGLIS 1000W 140 220-240/60 140B194	20880891

Approval marks:



Lamp types:



Technical data	
Max. winding temperature tw	130 °C
Screw terminal	1 – 4 mm ²

Specific technical data									
Lamp wattage	Lamp type	Rated lamp current	Type	Article number	Voltage	Mains frequency	Thermal protection	Length L	Fixing dimensions
									Hole spacing D1
Ballasts in standard design									
250 W	HS / HI	3.00 A	OGLIS 250W 40	27002347	230 / 240 / 250 V	50 Hz	yes	94 mm	80 mm
400 W	HS / HI	4.45 A	OGLS 400W 60	27002362	220 / 230 / 240 V	50 Hz	yes	114 mm	100 mm
600 W	HS	6.20 A	OGLS 600W 100	20882197	220 / 230 / 240 V	50 Hz	yes	154 mm	140 mm
1,000 W	HS / HI	10.30 A	OGLIS 1000 A024W	22148490	220 / 230 / 240 V	50 Hz	yes	194 mm	180 mm
1,000 W	HS / HI	10.30 A	OGLIS 1000 A024W	27002350	220 / 230 / 240 V	50 Hz	yes	194 mm	180 mm
Ballasts with double insulation									
250 W	HS / HI	3.00 A	OGLIS 250 C203D	22149035	230 / 240 / 250 V	50 Hz	yes	94 mm	80 mm
400 W	HS / HI	4.45 A	OGLS 400 C203D	22149038	230 / 240 / 250 V	50 Hz	yes	114 mm	100 mm
Ballasts with pulser tapping									
250 W	HS / HI	3.00 A	OGLIS 250 PC023W	22149231	230 / 240 V	50 Hz	yes	94 mm	80 mm
1,000 W	HS / HI	10.30 A	OGLIS 1000 PC023W	22148485	230 / 240 V	50 Hz	yes	234 mm	220 mm
Ballasts for 60 Hz									
400 W	HS / HI	4.45 A	OGLS 400W 60	20565518	220 / 230 / 240 V	60 Hz	no	114 mm	100 mm
600 W	HS	6.20 A	OGLS 600W 80	20821091	220 / 230 / 240 V	60 Hz	no	134 mm	120 mm
1,000 W	HS / HI	10.30 A	OGLIS 1000W 140	20880891	220 / 230 / 240 V	60 Hz	no	194 mm	180 mm