



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED BORDERLINE PANEL

TECHNICAL DATA

MODEL	VT-6448CCT
SKU	10336
USEFUL LUMENS	4800 Lm
COLOR TEMPERATURE	6500K/4000K/3000K
INPUT VOLTAGE	AC: 220-240V, 50hz
POWER	48W
DC OUTPUT	40-30V
BEAM ANGLE	110°
LIFE SPAN	30,000 Hours
ON/OFF CYCLE	>15,000 Times
PROTECTION RATING	IP20
CRI	>80
DF	>0.9
UNIT COLOUR	White
DIMENSION	595x595 mm



05 YEAR
WARRANTY*

LiFud
Driver

Super Bright

100
LUMENS/W





INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 5 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. For Indoor use only



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to
access the manual in multiple languages.

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu
For More products range, inquiry please contact our distributor or nearest dealers.
V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B









This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

INSTALLATION INSTRUCTION

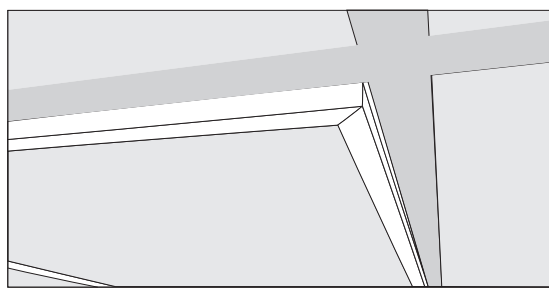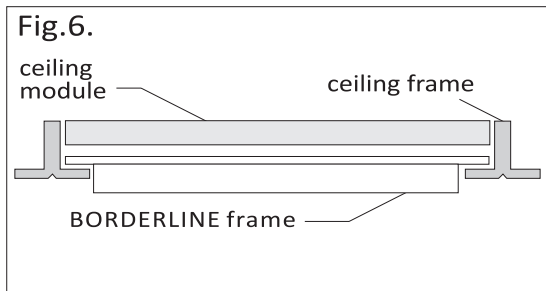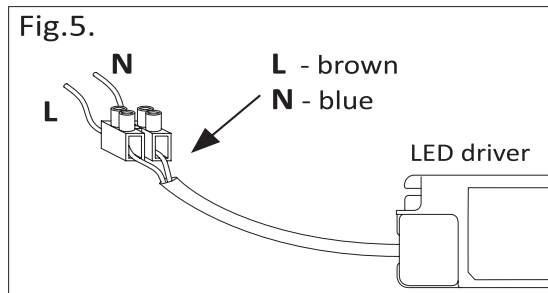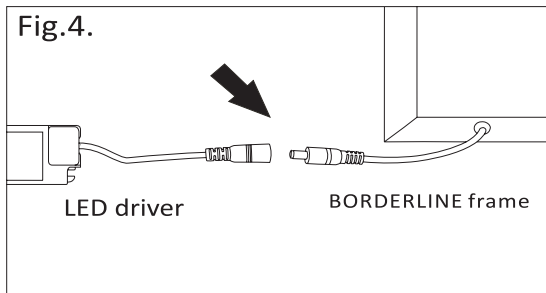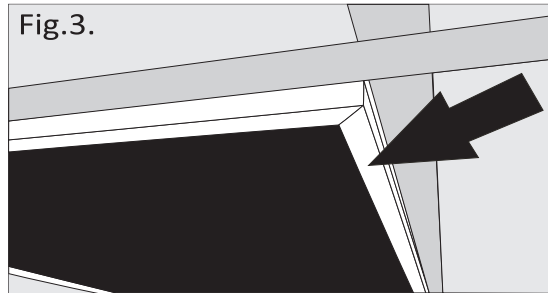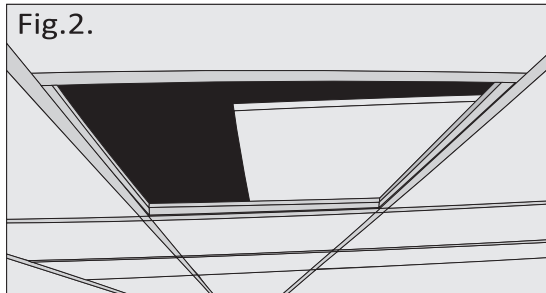

1. Take out the coffer ceiling module from the suspended ceiling [Fig.2]
2. Place the LED frame in the ceiling frame [Fig.3]
3. Connect LED frame to LED driver by attached to the luminaire output cable with plug. [Fig.4]
4. Connect the LED driver to mains ~230V 50/60Hz [Fig.5]
5. Connect power cable to the terminal block, accordingly: phase cable (brown) to the slot marked "L" and neutral cable (blue) to the slot marked "N".
6. Place the coffer ceiling module on the luminaire [Fig.6]

RoHS



UK
CA

