


WEEE Number: 80133970

## INSTALLATION INSTRUCTION

### FIRE RATED DOWNLIGHT FITTING (VT-703)

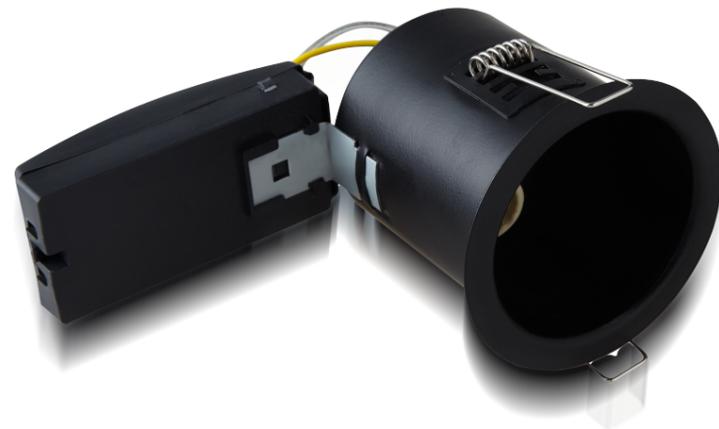

Optional Bezels (Not Included)



#### TECHNICAL DATA:

SKU	11286	11281
IP RATING	IP65	IP20
BASE	GU10 [Bulb not included]	
BODY TYPE	Iron	
DIMENSION	ø90x120mm	
INPUT POWER	AC:220-240V, 50/60Hz	
CUT OUT SIZE	ø80mm	



**Quick CONNECTOR**



**30-60-90 MIN Fire Rated**



**Push to Lock**  
FOR EASY LAMP REMOVAL

**3 YEARS WARRANTY\***

#### INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

#### WARNING!


1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a certified person.
3. Proper grounding should be ensured throughout the installation.



This marking indicates that this product should not be disposed of with other household wastes.








Caution, risk of electric shock.



Luminaires not suitable for covering with thermally insulating material.

#### INSTALLATION DIAGRAM:

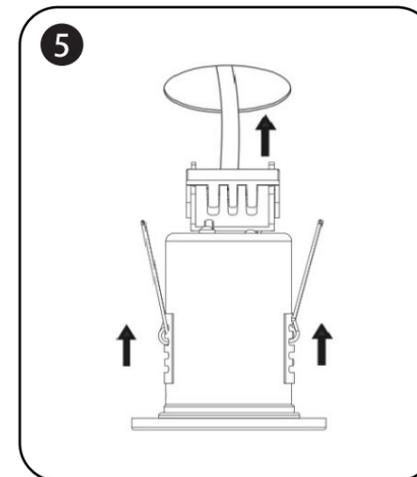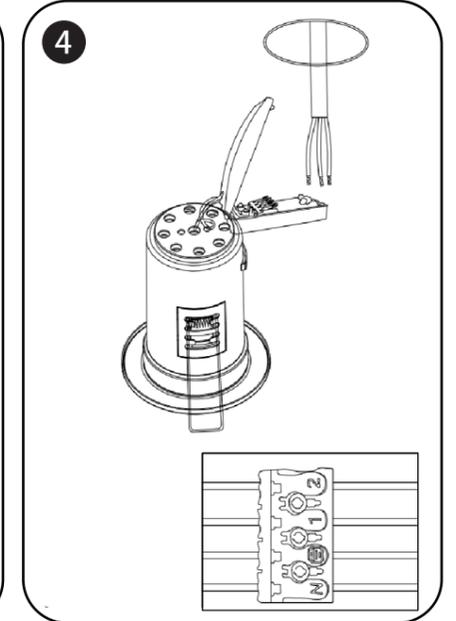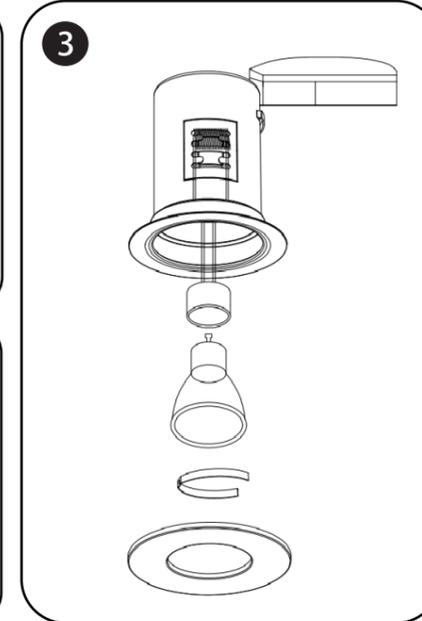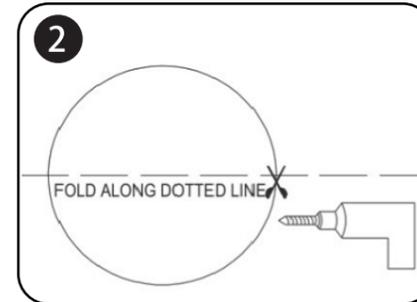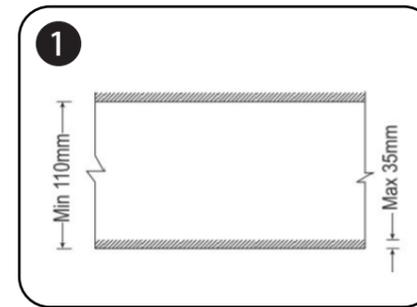

#### INSTALLATION INSTRUCTION

1. Switch off the power before starting the installation.
2. Cut a hole as per the cutout using appropriate tool. (Pic 2)
3. Install GU10 lamp into the fixture. Fix the GU10 lamp into the lamp holder. Push the bezel into the can. (Pic 3)
4. Make electrical connections to the terminal block. (Pic 4)
5. Holding the springs upwards and with fixture hanging down through the middle, offer the fitting into the hole and allow spring to pull the fitting up to the ceiling. (Pic 5)
6. Switch on the power and test if the light is working properly.