

TOPLITE SHROUD

Single-ended metal-halide lamps
for open fixtures

up to 15000 hours



ADVANTAGES:

- Low costs due to long maintenance intervals
- High fixture efficiency
- Average life 15000 hours
- Economic life 9000 hours
- Good colour rendering
- High luminous efficiency
- Clear and coated versions
- Lamps suitable for open fixtures

APPLICATIONS:


interior and exterior display lighting, e. g.:

- Open-plan offices
- Product displays
- Hotels and restaurants
- Museums and galleries
- Industrial halls
- Storage areas
- Parking lots
- Service stations



DISCHARGE LAMPS

MADE IN GERMANY

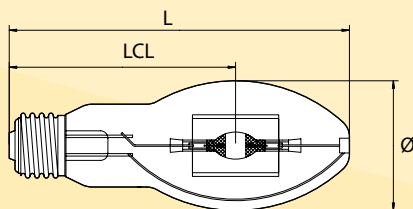

The shroud offers additional protection for the envelope.



Ignition voltage (kV)	4,0
Burning position	u360
Packing unit	12

Designation	Design	Wattage (W)	Lamp current (A)	Luminous flux (lm)	Colour temperature (K)	Average life (h)	Ø (mm)	Length L (mm)	LCL (mm)	Ra-Value	Base ⁸	Order no.
HIE-P70 ww E27 cl	clear	70	0,9	5500	3200	15000	55,0	138,0	86,0	2A	E27	223610
HIE-P70 ww E27 co	matte	70	0,9	5200	3200	15000	55,0	138,0		2A	E27	223660
HIE-P70 nw E27 cl	clear	70	0,9	5500	4000	15000	55,0	138,0	86,0	2A	E27	223600 ¹
HIE-P70 nw E27 co	matte	70	0,9	5200	4000	15000	55,0	138,0		2A	E27	223650 ¹
HIE-P100 ww E27 cl	clear	100	1,2	7600	3200	15000	55,0	138,0	86,0	2A	E27	223710
HIE-P100 ww E27 co	matte	100	1,2	7200	3200	15000	55,0	138,0		2A	E27	223760 ¹
HIE-P100 nw E27 cl	clear	100	1,2	8100	4000	15000	55,0	138,0	86,0	2A	E27	223700 ¹
HIE-P100 nw E27 co	matte	100	1,2	7600	4000	15000	55,0	138,0		2A	E27	223750 ¹
HIE-P150 ww E27 cl	clear	150	1,8	13300	3200	15000	55,0	138,0	86,0	2A	E27	223810
HIE-P150 ww E27 co	matte	150	1,8	12800	3200	15000	55,0	138,0		2A	E27	223860
HIE-P150 nw E27 cl	clear	150	1,8	12300	4000	15000	55,0	138,0	86,0	2A	E27	223800 ¹
HIE-P150 nw E27 co	matte	150	1,8	11700	4000	15000	55,0	138,0		2A	E27	223850 ¹
HIE-P250 nw E40 co	matte	250	3,0	22000	4200	8000	90,0	226,0		2A	E40	223951 ¹
HIE-P250 dw E40 co	matte	250	3,0	18000	5200	8000	90,0	226,0		1A	E40	223971
HIE-P400 nw E40 co	matte	400	4,0	37000 ⁹	4200	8000	120,0	290,0		2A	E40	223051
HIE-P400 dw E40 co	matte	400	4,0	30000 ⁹	5200	8000	120,0	290,0		1A	E40	223071

Information about guarantees see page 120. • ¹ on request • ⁸ Base E26 on request • ⁹ When operated with HPS ballast