Technical section Wiring diagrams


Ceilingmount PIR

Ceilingmount PIR Fitting - Three Wire*


374B-1, 374B-1FPC

Rating at 240V a.c.

- 10A
- Time Delay 2min 1h

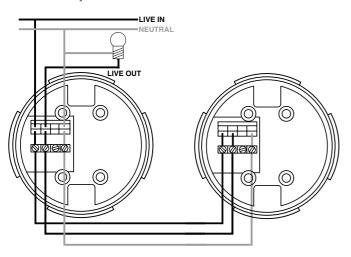


Ceilingmount PIR sensor detection diagram



Remote Timer

Remote Timer Fitting / Slave Fitting - Three Wire

320A-1

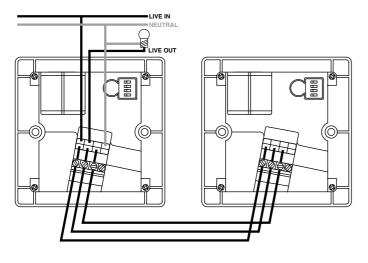

Rating at 240V a.c.

- All load types 16A
- Time Delay 2min 2h
- Slave options (350A-3, 360A-3, 376A-3)
- Momentary switches can also be used with Remote Timer

SLAVE OR MOMENTARY

NOTE: Can also be used with momentary switches. Contact Elkay technical for details 01675 468200.

REMOTE TIMER 320A-1

IMPORTANT NOTICE: All wiring should be carried out by a competent person or a qualified Electrician in accordance with the current IET Wiring Regulations. If you believe the unit is faulty call Elkay technical on 01675 468200 or return to place of purchase.

^{*}See Section 6/9 for 3 Wire dipswitches