

# SPECIFICATION SHEET

## 110V LED BASTION SITE NON-CORROSIVE FITTINGS

### Applications

- Site Lighting



Image shown SNCF420

### Specification

**LED:** 96-192pcs of 0.2W SMD 2835 / 168pcs of 0.5W SMD 2835

**Material:** ABS and polycarbonate

**Lumen Output:** 1800-4500lm (180lm - 450lm in emergency mode)

**Colour Temperature:** 4000K

**Guarantee:** 2 Years

**Life Expectancy:** 30,000 Hours

**Working Temperature:** -10° - 40°C (0° - 40°C in emergency)

**Power Factor:** 0.5 / 0.9


**Beam Angle:** 120°

**CRI:** 80 Ra

### Additional Information

- 90lm/W • Accessory pack included. • Fast fit connector included.
- Hanging bracket included. • Ni-Cd Battery included in the emergency versions. • Opal diffuser • 20mm gland sizes • Painted metal LED tray included. • Plastic clips included • Yellow finish

### Dimensions

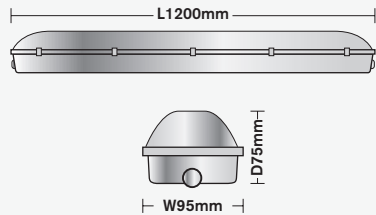

Code	Wattage	LED Qty	Emergency	Lumen Output	Power Factor	Dimensions (L x W x D mm)
SNCF220	20W	96pcs of 0.2W	No	1800lm	0.5	600 x 95 x 75
SNCF220E	20W	96pcs of 0.2W	Yes	1800lm	0.5	600 x 95 x 75
SNCF420	20W	144pcs of 0.2W	No	1800lm	0.5	1200 x 95 x 75
SNCF420E	20W	144pcs of 0.2W	Yes	1800lm	0.5	1200 x 95 x 75
SNCF525	25W	192pcs of 0.2W	No	2250lm	0.9	1500 x 95 x 75
SNCF525E	25W	192pcs of 0.2W	Yes	2250lm	0.9	1500 x 95 x 75
SNCF550	50W	168pcs of 0.5W	No	4500lm	0.9	1500 x 95 x 75
SNCF550E	50W	168pcs of 0.5W	Yes	4500lm	0.9	1500 x 95 x 75