


### HIE 400W/V/PS/740

### Product Number: 92008

**Lamp Type:** Uni-Form Pulse Start

#### Performance Data


Light Output (Lumens @ 100 hours)	44000
Lamp Lumens Per Watt	110
Rated Life (Hrs. @ 10 Hr. /Start)	30000
Correlated Colour Temperature (K)	4000
Chromaticity (CIE - X Y)	385, 390
Colour Rendering Index (CRI) or (Ra)	68
Typical Warm Up Time (Minutes)	2-3
Typical Hot Restart Time (Minutes)	4-6
Burning Position	Vertical±15°

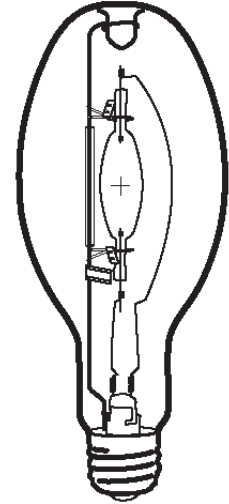


#### Physical Data / Requirements

Base Designation	E40
Bulb Designation	E120
Bulb Diameter (mm)	120
Max. Overall Length (mm)	296
Light Centre Length (mm)	182
Effective Arc Length (mm)	43.9
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	400
Luminaire Type	Enclosed
Socket Pulse Rating (KV)	4.5
Mercury Content (mg)	

**Lumen Maintenance**

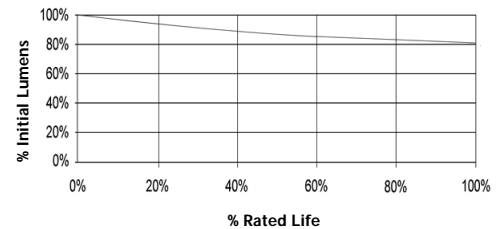

**Lamp Mortality**

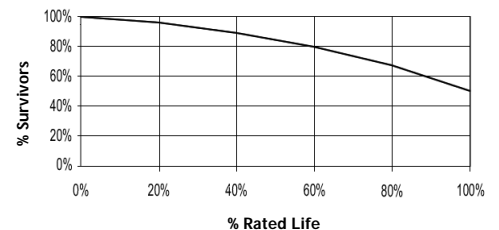

#### Lamp Electrical Data / Requirements

IEC Standard	-
Lamp Wattage (W)	400
Lamp Operating Voltage (V)	135
Lamp Operating Current (Amps)	3.2
Min. Open Circuit Voltage (RMS)	198
Min. - Max. Starting Pulse (Peak V)	3000-4500
Min. Pulse Width at 2700V (microseconds)	1
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

**Revision:** 11.03.2011

#### Notes:

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.

Rated Life is based on operation with Ventronic® or specifically approved electronic ballasts.

Minimum Operating Temperature: -40°C