

Electromagnetic ballasts



Type: NAHJ400.737F230/240V/50HZ

Item number: 179424

Standard version

Vacuum-impregnated with polyester resin

Screw terminals on base

Thermal cut-out with automatic reset

| | |
|---|-----------------------|
| Lamp type: | HS |
| Output [W]: | 0400 |
| Ignition system: | Superimposed |
| Voltage [V]: | 230 240 |
| Protection class: | Class of protection I |
| Encapsulated: | No |
| Thermal cut-out: | With thermal cut-out |
| Shape [mm*mm]: | 90x102 |
| Stack length [mm]: | 068 |
| Fixing centre [mm]: | 135 |
| Overall length [mm]: | 148 |
| Delta t Max. [K]: | 70 |
| Connection terminal [mm ²]: | Screw terminal |
| Weight [kg]: | 5,1900 |
| Frequency [Hz]: | 50 |




For a large drawing of item 179424 please click on the thumbnail-

Unit: 2 pcs.

tw 130

EN 61347 (Safety)

EN 60923 (Working method)

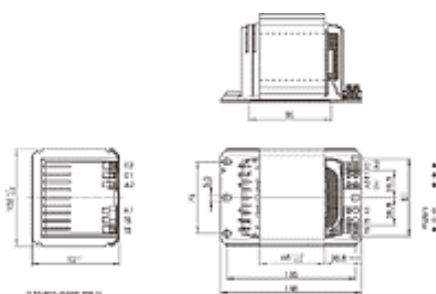

[Print Data Sheet](#)

If you want to use all features of this site you must log on. If this is first visit at the Vossloh Schwabe Web site please register now.

[Log In](#)

[Registration](#)

[Back](#)