

## Electronic Superimposed Ignitors for HI Lamps up to 3500 W

Standard version

For metal halide lamps (HI)

Phasing of the ignition voltage:


60-90 °el and 240-270 °el

Max. permitted casing temperature: 105 °C

Screw terminals: 0.75-2.5 mm<sup>2</sup>

Fastening: male nipple with pre-assembled washer and nut

For luminaires of protection class I and II

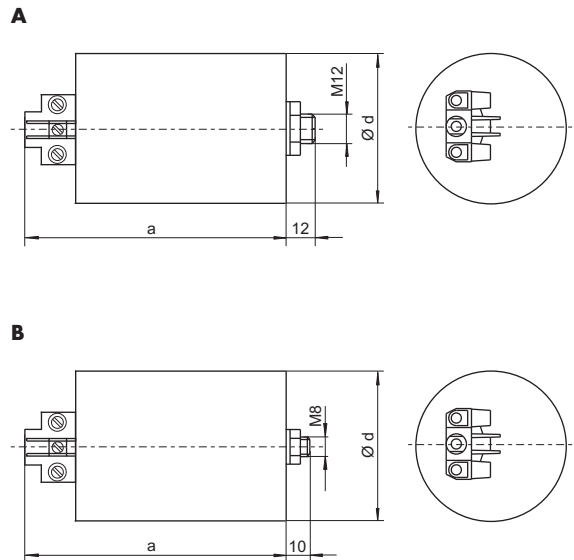

Type	Ref. No.	Voltage AC 50-60 Hz V	Max. lamp current A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Drawing	Casing d (Ø)			Weight g	
										a mm	b mm	c mm		
<b>Aluminium casing (Al)</b>														
Z 2000 S	<b>140432</b>	220-240	20	< 6	< 30	4-5	20-100	–	A	65	96	–	–	640
Z 2000 S/400 V	<b>140497</b>	380-415	12	< 5	< 32	4-5	20-2000	–	B	50	98	–	–	340
Z 3500 S/400 V	<b>140499</b>	380-415	20	< 7	< 35	4-5	20-100	–	B	65	96	–	–	650