



MASTER MHN-LA

MASTER MHN-LA 2000W/956 400V XWH UNP

Compact quartz metal halide lamps with double-pinch

Product data

• Product Data

Order code	200730 00
Full product code	871150020073000
Full product name	MASTER MHN-LA 2000W/956 400V XWH UNP
Order product name	MASTER MHN-LA 2000W/956 400V XWH UNP
Pieces per pack	1
Packing configuration	1
Packs per outerbox	1
Bar code on pack - EAN1	8711500200730
Bar code on outerbox - EAN3	8711500200730
Logistic code(s) - 12NC	928072505130
ILCOS code	MN-2000-E-K-/H
Net weight per piece	0.168 kg

• General Characteristics

Cap-Base	X528
Cap-Base Information	Cable
Bulb	TD40 [TD 40mm]
Bulb Finish	Clear
Burning Position	p5 [Parallel +/-5D or Horizontal(HOR)]
Life to 5% failures	4000 hr
Life to 10% failures	5000 hr
Life to 20% failures	8000 hr
Life to 50% failures	12000 hr

• Electrical Characteristics

Lamp Wattage	2000 W
Lamp Wattage EM	2040.0 W
Voltage	400 V

Lamp Voltage	225 V
Lamp Current EM	10.3 A
Dimmable	no

• Environmental Characteristics

Mercury (Hg) Content	130 mg
----------------------	--------

• Light Technical Characteristics

Colour Code	956 [CCT of 5600K]
Colour Rendering Index	90 Ra8
Colour Designation	Daylight
Colour Temperature	5600 K
Colour Temperature Technical	5600 K
Chromaticity Coordinate X	330 -
Chromaticity Coordinate Y	339 -
Lamp Luminous Flux EM	190000 Lm
Lamp Luminous Efficacy EM	93 Lm/W
Lumen Maintenance 2000h	80 %
Lumen Maintenance 5000h	65 %
Lumen Maintenance 10000h	55 %
Average Luminance EM	1300 cd/cm2
Lumen Maintenance 1500h	85 %

PHILIPS

sense and simplicity

MASTER MHN-LA

• UV-related Characteristics

Specific Eff. Radiant Power 370 mW/klm

• Product Dimensions

Base Face to Base Face A 364 mm
Overall Length C 356.5 mm
Diameter D 40 mm

Light Center Length L 145 mm
Arc Length O 108 mm
Cable Length X 58 mm

• Luminaire Design Requirements


Pinch Temperature 350 C
Bulb Temperature 920 C

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)


- The luminaire must be able to contain hot lamp parts if the lamp ruptures

Dimensional drawing



Product	A (Norm)	D (Max)	O (Norm)	X (Norm)
MHN-LA 2000W/956 400V XWH	364	40	108	58

Photometric data

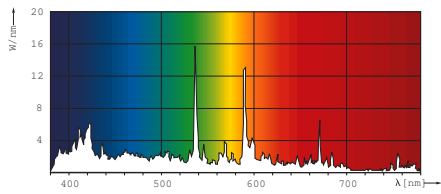

MASTER MHN-LA 1000W 400V /956



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, April 11
data subject to change