



## ADRC40D/700-1200MA

40W Universal DALI / DALI2 /  
(0)1-10V / Push Dimming Constant  
Current Driver

## UNIDRIVE-CC

### PRODUCT FEATURES

- DALI, DALI2, (0)1-10V, Retractive Push Dimming All-In-One Unit
- Selectable Constant Current Output By Dip Switch
- Wide Output Voltage
- Short Circuit / Over Temperature / Over Voltage Protection

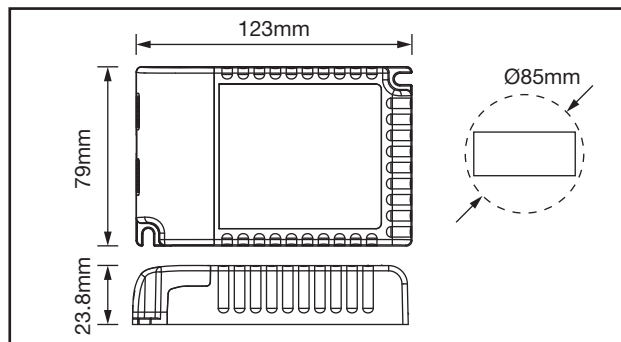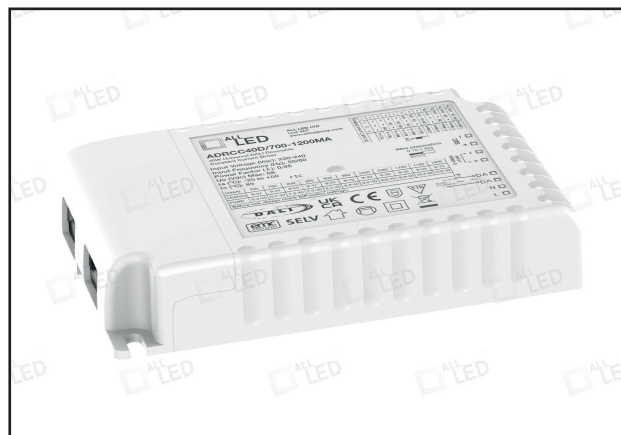

### TECHNICAL SPECIFICATIONS

PRODUCT CODE	ADRC40D/700-1200MA
Operating Voltage	220-240VAC
Operating Current (A max)	0.22A
Max Output Power	40W
Current / Output Power / Voltages	700mA, 6.3-40W, (9-57V DC)
	750mA, 6.7-40W, (9-54V DC )
	800mA, 7.2-40W, (9-50V DC)
	850mA, 7.6-40W, (9-47V DC)
	900mA, 8.1-40W, (9-45V DC)
	950mA, 8.5-40W (9-42V DC)
	1000mA, 9.0-40W, (9-40V DC)
	1050mA, 9.5-40W, (9-38V DC)
	1100mA, 9.9-40W, (9-36V DC)
	1150mA, 10.3-40W, (9-35V DC)
	1200mA, 10.8-40W, (9-33V DC)
Output Voltage (Max)	68V DC
PF	0.95
Efficiency %	83
No Load Power (W)	<0.5W
Dimming %	2%-100%
Class	II
Body Material	Polycarbonate
Switching cycles	100,000
Frame Colour	White
Ingress Protection	IP20
Ambient Operating Temperature (°C)	-25°C ~ +50°C
Input Frequency (Hz)	50/60Hz
Guarantee	5 Years
Dimmable	PUSH DIM, (0) 1-10V, DALI
Life Time	50,000H