

**Product selected: FHO 24W/865**

A new generation of triphosphor High Output slim linear fluorescent tubes offering superior colorimetric, photometric and lumen maintenance performance. Particularly suitable for use in the new low profile recessed and suspended luminaires and modular systems. 2. FHO - Fluorescent High Output is the optimised solution for indirect lighting.

**Applications**

- Industrial and commercial lighting
- Shops
- Department stores
- Restaurants and reception areas

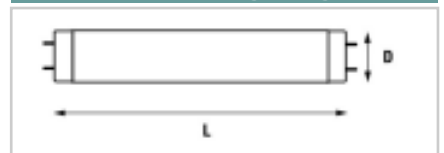
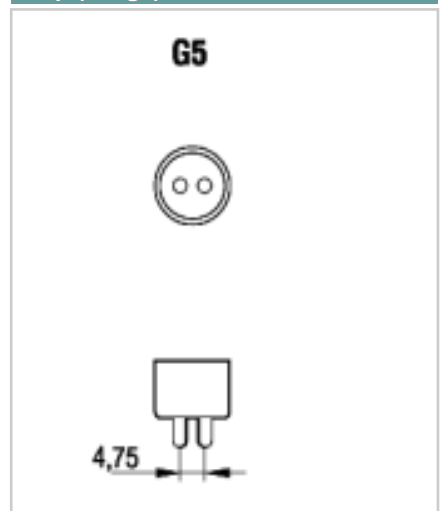
**Features**

- Higher lumen output: from 1850 lm to 4900 lm
- Almost constant lumen maintenance throughout the entire life of the lamp due to Luxline Plus triphosphor technology
- High colour rendering (Ra85/Class1B)
- For electronic ballast operation only giving greater efficiency and advantages in improved starting and life performance
- Optimised ambient operating temperature at 35° C (max lumen output) allows compact luminaire designs
- Reduced storage volume and transportation costs
- Average rated life: up to 20000 hours

**Product Attributes**

|   |                 |
|---|-----------------|
| Item description                                  | FHO 24W/865     |
| Nominal wattage (W)                               | 24              |
| Rated Wattage (W) 50 Hz                           | -               |
| Rated Wattage (W) HF                              | 23.3            |
| Bulb finish / Light colour                        | Daylight Deluxe |
| Cap   | G5              |
| Maximum Lamp length L [mm]                        | 563.2           |
| Diameter D [mm]                                   | 16              |
| Mercury content per lamp [mg]                     | 3.2             |
| Colour rendering Index - CRI (class / %)          | /85             |
| Colour temperature (K)                            | 6000            |
| Nominal luminous flux at 25°C (lm)                | 1570            |
| Nominal luminous flux at 35°C (lm)                | 1850            |
| Lumen maintenance min. 2000 h (50 Hz)             | -               |
| Lumen maintenance min. 4000 h (50 Hz)             | -               |
| Lumen maintenance min. 6000 h (50 Hz)             | -               |
| Lumen maintenance min. 8000 h (50 Hz)             | -               |
| Lumen maintenance min. 12000 h (50 Hz)            | -               |
| Lumen maintenance min. 16000 h (50 Hz)            | -               |
| Lumen maintenance min. 20000 h (50 Hz)            | -               |
| Lumen maintenance min. 2000 h (HF preheat)        | 0.96            |
| Lumen maintenance min. 4000 h (HF preheat)        | 0.94            |
| Lumen maintenance min. 6000 h (HF preheat)        | 0.93            |
| Lumen maintenance min. 8000 h (HF preheat)        | 0.92            |
| Lumen maintenance min. 12000 h (HF preheat)       | 0.91            |
| Lumen maintenance min. 16000 h (HF preheat)       | 0.9             |
| Lumen maintenance min. 20000 h (HF preheat)       | 0.88            |
| Ambient temperature for max. lumen flux (°C)      | 35              |
| Rated luminous flux at 25°C (lm)                  | 1561            |
| Rated lamp efficacy (lm/W) at 100 h - 50 Hz, 25°C | 67              |
| Nominal average life (h)                          | 24000           |
| Survival factor 2000 h (50 Hz)                    | -               |
| Survival factor 4000 h (50 Hz)                    | -               |
| Survival factor 6000 h (50 Hz)                    | -               |
| Survival factor 8000 h (50 Hz)                    | -               |
| Survival factor 12000 h (50 Hz)                   | -               |
| Survival factor 20000 h (50 Hz)                   | -               |

**Product Image**

**Product line drawing (image)**

**Cap (image)**


|                              |               |
|------------------------------|---------------|
| Survival factor 2000 h (HF)  | 0.99          |
| Survival factor 4000 h (HF)  | 0.98          |
| Survival factor 6000 h (HF)  | 0.96          |
| Survival factor 8000 h (HF)  | 0.93          |
| Survival factor 12000 h (HF) | 0.92          |
| Survival factor 16000 h (HF) | 0.9           |
| Survival factor 20000 h (HF) | -             |
| Packing Quantity             | 25            |
| EAN Code                     | 5410288027746 |
| Ordering Code                | 0002774       |

## Fixture rating

