

OMNI FILAMENT GLS BULB B22 1521LM 11.2W 4000K NON-DIMM 320 BEAM CLEAR FULL GLASS INTEGRAL

ILGLSB22NE129



Integral Filament Omni GLS Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in ceiling pendants and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

Quick Order Code:	315929
Barcode:	5055788271895
Category:	Lamps
Range Name:	Omni
Product Type:	GLS
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	103
Product Width (mm):	60
Product Weight (g):	33
Material:	Aluminium, Glass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Glass shell, Filament strip, Aluminium base
Globe Finish:	Clear
Globe Type:	GLS
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	11.2
Power Consumption (W) :	11.2
Power Factor:	0.5
Wattage equivalent (W):	100



Amperage (mA):	90
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	1521
Luminous efficacy (lm/W):	135
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000K - Cool White
Colour Temperature Name:	Cool White
Beam Angle:	320
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Filament chip
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A++
New Energy Rating:	D
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

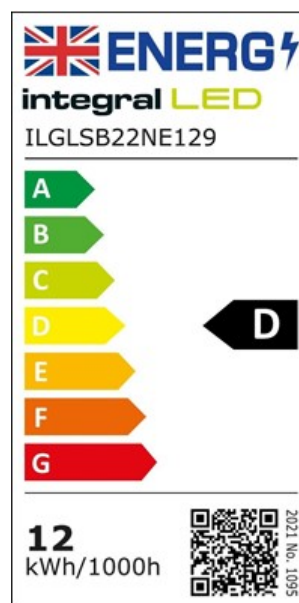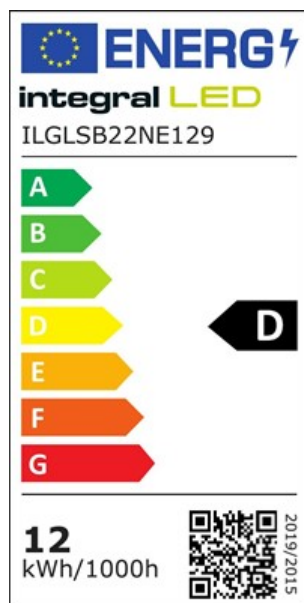

Packaging

Package Weight (g):

58

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	120
Package Width (mm):	65
Package Depth (mm):	65
Qty per euro pallet:	1440