

Product selected: Lynx-LE 55W 840


## Product Attributes

Item description	Lynx-LE 55W 840
Nominal wattage (W)	55
Bulb finish / Light colour	840
Cap	2G11
Diameter D [mm]	40
Mercury content per lamp [mg]	4.5
Colour rendering Index - CRI (class / %)	1B/85
Colour temperature (K)	4000
Lumen maintenance min. 12000 h (50 Hz)	-
Lumen maintenance min. 16000 h (50 Hz)	-
Lumen maintenance min. 20000 h (50 Hz)	-
Lumen maintenance min. 2000 h (HF preheat)	0.97
Lumen maintenance min. 4000 h (HF preheat)	0.95
Lumen maintenance min. 6000 h (HF preheat)	0.94
Lumen maintenance min. 8000 h (HF preheat)	0.92
Lumen maintenance min. 12000 h (HF preheat)	-
Lumen maintenance min. 16000 h (HF preheat)	-
Lumen maintenance min. 20000 h (HF preheat)	-
Ambient temperature for max. lumen flux (°C)	25
Rated luminous flux at 25°C (lm)	4779
Nominal average life (h)	10000
Survival factor 12000 h (50 Hz)	-
Survival factor 20000 h (50 Hz)	-
Survival factor 2000 h (HF)	0.99
Survival factor 4000 h (HF)	0.98
Survival factor 6000 h (HF)	0.96
Survival factor 8000 h (HF)	0.93
Survival factor 12000 h (HF)	-
Survival factor 16000 h (HF)	-
Survival factor 20000 h (HF)	-
Packing Quantity	25
EAN Code	5410288254654
Ordering Code	0925465


## Product Image



## Product line drawing (image)



## Cap (image)

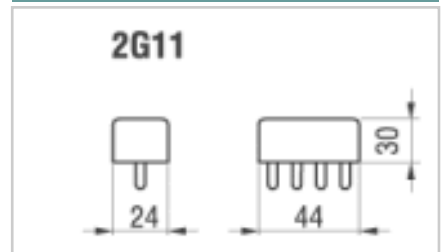

## Fixture rating

