

HIE 250W/V/LU/740
Product Number: 31668

Lamp Type: White-Lux Plus

Performance Data


Light Output (Lumens @ 100 hours)	22000
Lamp Lumens Per Watt	88
Rated Life (Hrs. @ 10 Hr. /Start)	20000
Correlated Colour Temperature (K)	4000
Chromaticity (CIE - X Y)	385, 390
Colour Rendering Index (CRI) or (Ra)	68
Typical Warm Up Time (Minutes)	2-3
Typical Hot Restart Time (Minutes)	3-5
Burning Position	Vertical±15°

Physical Data / Requirements


Base Designation	E40
Bulb Designation	E90
Bulb Diameter (mm)	90
Max. Overall Length (mm)	215
Light Centre Length (mm)	131
Effective Arc Length (mm)	30.1
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	400
Luminaire Type	Enclosed
Socket Pulse Rating (KV)	4.5
Mercury Content (mg)	

Lamp Electrical Data / Requirements


IEC Standard	-
Lamp Wattage (W)	250
Lamp Operating Voltage (V)	95
Lamp Operating Current (Amps)	3.1
Min. Open Circuit Voltage (RMS)	198
Min. - Max. Starting Pulse (Peak V)	2800-4500
Min. Pulse Width at 2500V (microseconds)	1
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

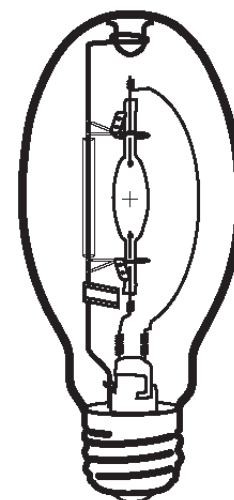

Lumen Maintenance

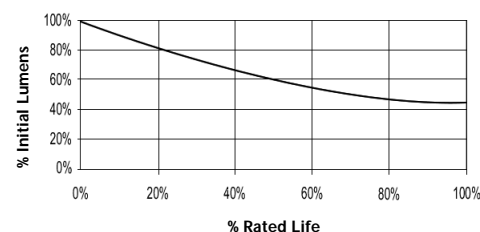

Lamp Mortality

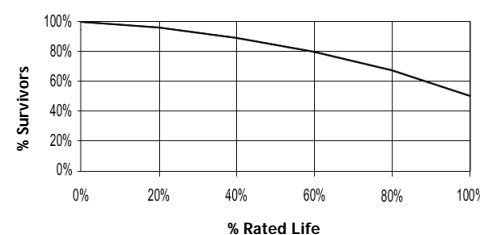

Revision: 28/02/2006

Notes:

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.