

ADRCC350TD/12-25



Drive350 12-25W Dimmable 350mA
Constant Current LED Driver

PRODUCT FEATURES

- Excellent Dimming Compatibility
- Smooth Dimming Performance
- Flicker Free Dimming
- Compact Size
- Easy Wire Large Terminals
- Max. DC Loom Length 200m (1.5mm² Cable)
- 12...25 PCS X 1W LED (350mA)
- Loop-In Loop-out Terminals



SERIES WIRING DIAGRAM

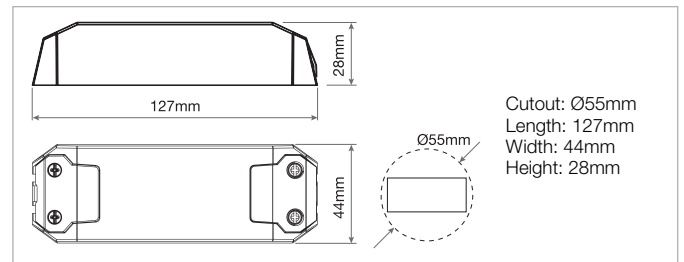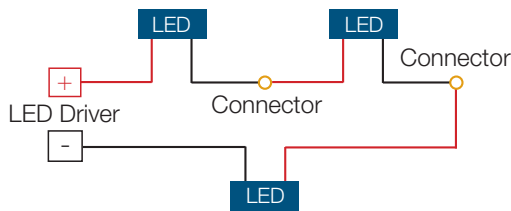

TECHNICAL SPECIFICATIONS

Product Code	ADRCC350TD/12-25
Operating Voltage	220-240VAC
Operating Current (A Max)	0.16
Output Power Range	12-25W
Output Current (Max)	350mA
Output Voltage Range	36-72VDC
Output Voltage (Max)	78VDC
PF	>0.95
Efficiency %	84%
No Load Power (W)	<0.5
Dimmable	Yes
Class	II
Body Material	White Polycarbonate
Switching Cycles	30,000
Ingress Protection	IP20
Ambient Operating Temperature (°C)	-20°C ~ +50°C
Input Frequency (Hz)	50/60Hz
Guarantee	3 Years
Dimmable	Yes
Dimming Mode (Trailing or Leading)	Trailing or Leading
Output Type	Constant Current
Life Time	30,000 Hours

